


# Portable Gas Leak Detector

Gas Detection for Life

Model GH-202F  
(Sample Drawing type)

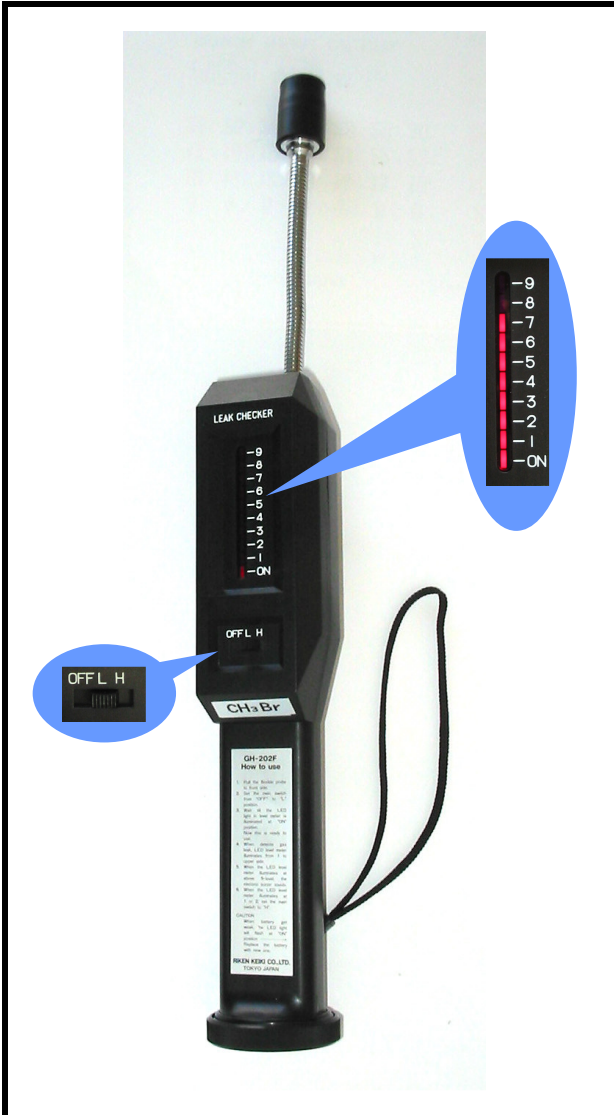

## Features

- Easy-to-read LED lever meter
- High sensitivity sensor
- Long life semi-conductor sensor
- Internal automatic balance circuit
- Rapid warm-up
- Compact design

## For detection of:

- LPG
- Town gas
- Methyl bromide
- Flon 12
- Ammonia and many others

## General

The model GH-202F is a fully compact and handy battery operated instrument with a built in high sample drawing fan and high sensitive semi-conductor gas sensor. The basic versions are designed to detect and trace leaking sources of Flon 12, Methyl Bromide, Ammonia and Hydrocarbons.

The GH-202F has an easy to read LED level meter and an audio alarm. The instrument incorporates a unique automatic balance and purge circuit. This allows the GH-202F to compensate for any background noise and temperature variations.

A high and low sensitivity switch allows you to choose between a higher or lower range. When the battery voltage is dropped to replacement level, the power lamp starts flashing at the "ON" position.

## Specifications:

Sensor type	Semi-conductor
Maximum detection sensitivity	H: 0 - 20 ppm (30ppm with Flon 12) & L: 0 -200 ppm
Sampling flow rate	Approx. 300 cc/min
Temperature range	-5°C to 40°C
Continuous operating hours	Approx 4 hours by alkaline dry batteries
Warm-up time	Less than 40 seconds
Leak display	Continuous illumination by LED bar graph
Precaution of battery life	Flashing of power lamp
Dimensions	50 (W) x 270 (H) x 60 (D) mm

## Standard accessories:



## AUSTGAS Instrument Services Pty Ltd

13 Greer St  
Bonnyrigg Heights NSW 2177  
AUSTRALIA

Phone: +61 2 9823 2551  
Fax: +61 2 9822 9284  
Mobile: +61 451 304 884  
Email: [austgas@hotmail.com](mailto:austgas@hotmail.com)



RIKEN KEIKI